



Overview

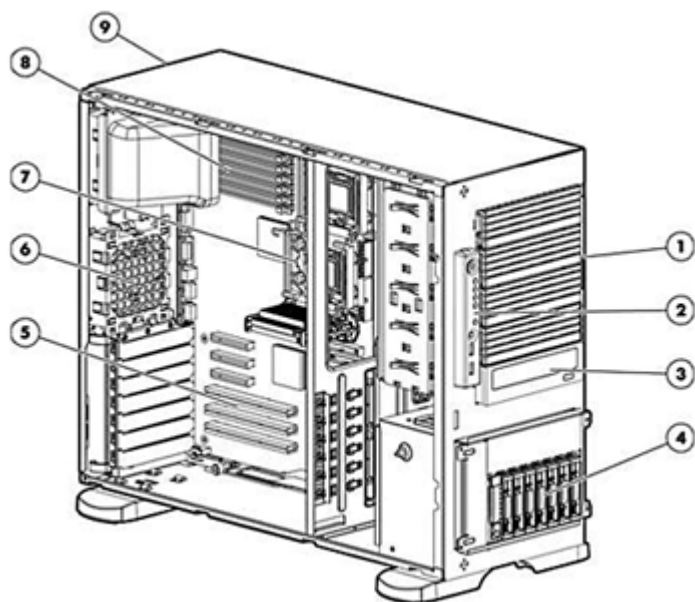

Front View:

1. Five removable media bays
2. Front display panel; includes power button, UID, two USB 2.0 ports, and system status LED's
3. CD-ROM Drive (Dual-Core models), DVD-ROM Drive (Quad-Core models)
4. Eight SFF (2.5") (shown) or six LFF (3.5") SAS or SATA Hot Plug drive bays
5. Six expansion slots (three PCI Express, three PCI-X)
6. Two system fans standard with support for optional redundant system fans
7. Support for two Intel® Dual-Core or Quad-Core Xeon® 5000 sequence processors
8. Eight PC2-5300 FB-DIMM (DDR2 667) memory sockets
9. Single Hot-Plug power supply standard, optional second redundant supply for availability

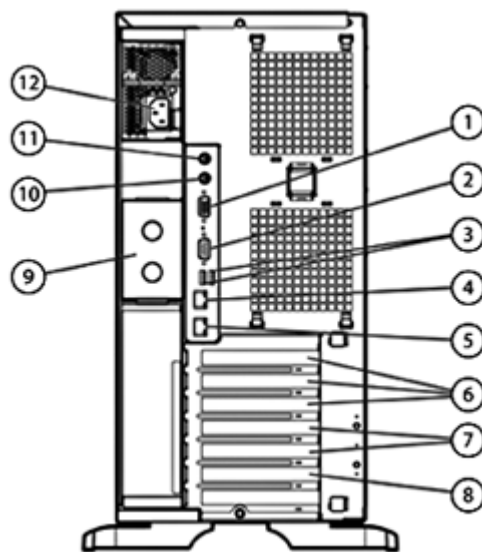

Rear View:

1. Monitor port
2. Serial port
3. USB ports
4. Integrated Lights-Out 2 (iLO2) port
5. Network port
6. PCI Express x4
7. PCI-X 64/100
8. PCI-X 64/133
9. Access to add 2nd redundant power supply
10. Mouse port
11. Keyboard port
12. Power

At A Glance

Building on a tradition of excellence, the HP ProLiant family introduces the fifth generation HP ProLiant ML350 server. The HP ProLiant ML350 G5 server provides Multi-Core performance, enterprise level management, and highly available redundant options in a modular server form factor. New for this generation is a smaller and quieter chassis, embedded Smart Array E200i Controller and 5 media bays.

Processors:

- Quad-Core and Dual-Core Intel® Xeon® processors for blazing performance; systems support up to 2 processors
- 1333/1066/667 MHz front side bus (FSB)
- Intel® 5000Z chipset

Memory:

- Eight PC2-5300 Fully Buffered DIMMs (DDR2 667) sockets with online-spare support for cost-effective memory configuration and expansion and 2:1 interleaving
- Up to 16 GB of memory supported on Dual-Core 5000 and 5100 series
- Up to 32 GB of memory supported on Dual-Core 5200 series, Quad-Core 5300 and 5400 series

Storage Controllers:

- Entry Models: HP Smart Array E200i/64MB Controller (integrated SAS/SATA Hot-Plug Controller with RAID

Overview

- 0/1/1+0 support)
 - 128MB BBWC optional upgrade kit for RAID 5 support also available
 - Base Models: HP Smart Array E200i/128 BBWC Controller (RAID 0/1/1+0/5)
- **Internal Drive Support:**
 - Up to eight SFF (2.5") or six LFF (3.5") Hot Plug Serial Attached SCSI (SAS) or Serial-ATA (SATA) hard drives
 - Maximum of 6TB of internal storage capacity (using Hot-Plug SATA drives)
- **Network Controller:**
 - Embedded NC373i Multifunction Gigabit Network Adapter with TCP/IP Offload Engine, including support for Accelerated iSCSI through an optional Licensing Kit
- **Expansion Slots:**
 - Six total expansion slots
 - One 64-bit/133-MHz PCI-X; two 64-bit/100-MHz PCI-X; three x8 PCI Express (x4 speed)
 - Optional PCI-X Expander provides additional two 64-bit/100-MHz PCI-X slots by converting a single PCI Express slot
 - A single x8 PCI Express slot with x8 bus speed can be achieved by attaching the x4/x8 PCIE Bus Expander option kit. (Please see the chart and notes in the Expansion Slots under Standard Features below for more details)
- **USB Ports:**
 - Six USB 2.0 ports: (2) front; (2) rear; (2) internal
- **Redundancy:**
 - Optional Hot plug redundant power supplies
 - Support for optional redundant system fans
- **Infrastructure Management:**
 - Convenient slide-out Systems Insight Display for quick and easy front view server diagnostics, along with status LEDs, Automatic Server Recovery (ASR), ROM Based Setup Utility (RBSU)
 - HP ProLiant Onboard Administrator (powered by the HP Integrated Lights-Out 2 management processor) for simplified server setup, health monitoring and recovery, power and thermal control, and lights-out remote administration.
 - HP Insight Control a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, control and optimize your IT infrastructure through a single, simple management console. Insight Control supports both Windows and Linux-based central management servers.
 - HP Insight Dynamics for ProLiant, a product option, is an integrated command center that enables IT Staff personnel to continuously analyze and optimize a converged infrastructure, while automating and reducing the cost of common data center tasks by as much as 40 percent. This ultimately enables them to dynamically keep pace with the organization's changing business requirements.
- **Operating Systems and Virtualization Software Support for ProLiant Servers:**
 - Supports Windows, RHEL, SLES, OEL, NetWare
- **Deployment/Serviceability:**
 - Optional parallel and second serial port available without using a PCI slot
 - Tool-free chassis entry and component access
 - Tool-free motherboard removal
 - Universal rail solution supporting both square and round hole rack environments
 - Customer Self Repair (CSR): HP products are designed with many CSR parts to minimize repair time and allow for greater flexibility in performing defective parts replacement
- **Warranty:**
 - This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.
 - **NOTE:** Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

Standard Features

NOTE: For a brief, printer friendly data sheet that describes this product and informs you of the essential capabilities and specifications, please visit: <http://h71028.www7.hp.com/ERC/downloads/4AA0-6362ENW.pdf>.

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

Processor

One of the following
depending on Model

Quad-Core Processors

- Quad-Core Intel® Xeon® Processor X5460 (3.16 GHz, 120 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5440 (2.83 GHz, 80 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor L5420 (2.50 GHz, 50 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5405 (2.00 GHz, 80 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor X5355 (2.66 GHz, 120 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5345 (2.33 GHz, 80 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5335 (2.00 GHz, 80 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5430 (2.66 GHz, 80 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5420 (2.50 GHz, 80 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5410 (2.33 GHz, 80 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5320 (1.86 GHz, 80 Watts, 1066 FSB)
- Quad-Core Intel® Xeon® Processor E5310 (1.60 GHz, 80 Watts, 1066 FSB)

Dual-Core Processors

- Dual-Core Intel® Xeon® Processor X5260 (3.33 GHz, 80 Watts, 1333 FSB)
- Dual-Core Intel® Xeon® Processor E5205 (1.86 GHz, 65 Watts, 1066 FSB)
- Dual-Core Intel® Xeon® Processor 5160 (3.0 GHz, 80 Watts, 1333 FSB)
- Dual-Core Intel® Xeon® Processor 5150 (2.66 GHz, 65 Watts, 1333 FSB)
- NOTE:** Available via Configure-To-Order only. See Factory Integrated Models section for more information.
- Dual-Core Intel® Xeon® Processor 5140 (2.33 GHz, 65 Watts, 1333 FSB)
- Dual-Core Intel® Xeon® Processor 5130 (2.00 GHz, 65 Watts, 1333 FSB)
- Dual-Core Intel® Xeon® Processor 5120 (1.86 GHz, 65 Watts, 1066 FSB)

Cache Memory

One of the following
depending on Model

- 12MB (2 x 6MB) Level 2 cache (5400 series)
- 8MB (2 x 4MB) Level 2 cache (5300 series)
- 6MB (1 x 6MB) Level 2 cache (5200 series)
- 4MB (1 x 4MB) Level 2 cache (5100 series)
- 4MB (2 x 2MB) Level 2 cache (5000 series)

Upgradeability

- Upgradeable to 2 processors (4 or 8 cores)
- NOTE:** Future upgradeable to Xeon® Series 5400/5300 Quad-Core processors (Please contact your regional sales support to determine quad core upgradeability. Some of the earlier shipping models may not support this upgrade). 5100 Dual-Core models are not upgradeable to the 5200 Dual-Core processors.

Chipset

- Intel® 5000Z Chipset
- NOTE:** For more information regarding Intel® chipsets, please see the following URL: <http://www.intel.com/products/server/chipsets/>.

Memory Protection

- Online spare
- Advanced ECC



Standard Features

Memory

One of the following depending on model

Type	PC2-5300 Fully Buffered DIMMs (DDR2-667)
Standard (Entry Models)	512 MB (1 x 512 MB) on Dual-Core Models 1 GB (2 x 512 MB) on Quad-Core 5300 series 1 GB (2 x 512 MB) on Quad-Core 5400 series
Standard (Base Models)	1 GB (2 x 512 MB) on Dual-Core Models 1 GB (2 x 512 MB) on Quad-Core 5300 series 2 GB (2 x 1 GB) on Quad-Core 5400 series
Maximum (Dual-Core 5000 & 5100 series)	16 GB (8 x 2 GB)
Maximum (Dual-Core 5200, Quad-Core 5300 & 5400 series)	32 GB (8 x 4 GB)

Network Controller

Embedded NC373i Multifunction Gigabit Network Adapter with TCP/IP Offload Engine, including support for Accelerated iSCSI through an optional Licensing Kit

Expansion Slots

Expansion Slot #	Technology	Bus Width	Connector Width*	Bus Number**	Form Factor	Notes
6	PCI Express	x4	x8	15	Standard Height/Length	
5	PCI Express	x4	x8	6	Standard Height/Length	
4	PCI Express	x4	x8	9	Standard Height/Length	
3	64-bit / 100MHz PCI-X	NA	NA	12	Standard Height/Length	PCI-X 100MHz
2	64-bit / 100MHz PCI-X	NA	NA	12	Standard Height/Length	PCI-X 100MHz
1	64-bit / 133MHz PCI-X	NA	NA	20	Standard Height/Length	PCI-X 133MHz

NOTES:
* Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.
** Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

Storage Controller

Entry Models	HP Smart Array E200i/64MB Controller
Base Models	HP Smart Array E200i/128 BBWC Controller

NOTE: Supports RAID 0/1/1+0 with 64MB of Cache, upgradeable to 128MB with BBWC for RAID 5 support.

Standard Features

Storage	Diskette Drives	None included standard	
	Optical Drive One of the following depending on model	Quad-Core 5400 series: 16x SATA DVD-ROM drive Quad-Core 5300 series: 16x PATA DVD-ROM drive Dual-Core: 48x IDE CD-ROM drive NOTE: Quad-Core 5400 series BTO Models are configured with SATA optical drive.	
	Hard Drives	None included standard	
Maximum Internal Storage One of the following depending on model	Hot Plug LFF SATA	6TB	6 x 1TB
	Hot Plug LFF SAS	6TB	6 x 1TB
	Hot Plug SFF SATA	4.0TB	8 x 500GB
	Hot Plug SFF SAS	4.0TB	8 x 500GB
Interfaces	Parallel	Optional parallel port available	
	Serial	1 (optional 2nd serial port available)	
	Pointing Device (Mouse)	1	
	Graphics	1	
	Keyboard	1	
	Network RJ-45	2 (1 dedicated for iLO 2)	
	USB 2.0 Ports	6 (2 front, 2 rear, 2 internal) NOTE: Please see the following URL for additional information regarding USB support: http://h18004.www1.hp.com/products/servers/platforms/usb-support.html .	
Graphics	Integrated ATI ES1000, 32MB video standard		
	• 16 bit color: maximum resolution of 1600 x 1200 • 32 bit color: maximum resolution of 1280 x 1024 NOTE: Maximum resolution available via iLO 2 remote console is 1280 x 1024.		
Form Factor	Tower or Rack (5U)		
	NOTE: Rack models (and rack conversion kit) support: • Square or round hole racks 24"- 36" deep, including HP Rack System /E and HP Systems • Telco racks with 3rd part option kit from Rack Solutions http://www.racksolutions.com/hp		
HP Insight management software	HP Insight Foundation	Managing the growing number of servers can be complex and expensive for your organization. IT managers need to address changing business needs with tools that meet the challenges of managing today's complex Datacenters.	
		HP provides management solutions that are designed to simplify a server's installation, configuration and maintenance throughout the entire server lifecycle. This provides the customer with higher levels of operational efficiency and highly reliable systems: http://www.hp.com/go/foundation .	
		The foundation pack includes: • HP SmartStart • •	





Standard Features

- HP Management
- HP ProLiant Firmware Maintenance

SmartStart version supported (minimum): SmartStart 7.60.
<http://www.hp.com/servers/smartstart>

ProLiant Onboard Administrator

HP ProLiant Onboard Administrator (powered by the HP Integrated Lights-Out 2 management processor) simplifies server setup, health monitoring, power and thermal control, and lights-out remote administration of ProLiant ML, DL, and BL servers. HP ProLiant Onboard Administrator functions without additional software, and can be accessed from any location via a web browser. It works hand-in-hand with HP Systems Insight Manager, Insight Control suites, and the Insight Dynamics for ProLiant helping customers unlock the value of the ProLiant platform and deliver the highest possible quality of IT service to the business. See: www.hp.com/go/ProLiantOA

HP Insight Control

HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console.

Two versions of Insight Control are available, to serve environments requiring either a Linux-based or a Windows-based central management server: HP Insight Control for Linux, and HP Insight Control. See www.hp.com/go/insightcontrol

HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: <http://www.hp.com/services/insight>.

HP Insight Dynamics for ProLiant

HP Insight Dynamics for ProLiant, a product option, is an integrated command center that enables IT Staff personnel to continuously analyze and optimize a converged infrastructure, while automating and reducing the cost of common data center tasks by as much as 40 percent. As a powerfully integrated by design toolkit to accelerate complex technology projects and simplify daily operations that ultimately enable IT Staff personnel to dynamically keep pace with the organizations changing business requirements. It enables them to plan capacity and power continuously, balance across physical and virtual resources, and ensure cost-effective high availability. It also enables IT organizations to provision infrastructure consistently and automatically from pools of shared resources using a self-service portal. Resources provisioned can range from a single virtual machine to complex multi-tier environments and their associated physical and virtual resource requirements. In addition to the previous functional benefits, it also provides a cost-effective disaster recovery for physical and virtual environments that works with HP StorageWorks Continuous Access software for both the Enterprise Virtual Array and the XP storage array allowing application environments to be reactivated in minutes with the touch of a button to a remote location.

NOTE: For more information, visit:
<http://www.hp.com/go/insightdynamics>

Standard Features

Industry Standard Compliance	ACPI V2.0 Compliant
	PCI 2.2 Compliant
	PXE Support
	WOL Support
	PCI-X 1.0a Compliant
	Novell Certified
	Microsoft® Logo certifications
	USB 2.0

Availability	Optional Hot-Plug, Redundant Power supply Online-Spare Memory Optional Dual Redundant System Fans
--------------	---

System Management	HP Systems Insight Manager SmartStart Redundant ROM System Firmware Update ROMPaq ProLiant RBSU (ROM-Based Setup Utility) Automatic Server Recovery-2 (ASR-2) Dynamic Sector Repairing (with Smart Array Controller) Drive Parameter Tracking (with Smart Array Controller) Pre-Failure Warranty (covers processors, memory, and SAS hard drives)
-------------------	--

Security	Power-on password Setup password Diskette boot control Parallel and serial interface control Disk configuration lock Power switch security
----------	---

Server Power Cords	ProLiant ML servers in a rack-mount configuration no longer ship standard with NEMA power cords that allow connection to 110V US wall outlets in a home or office. These servers are primarily connected to PDU's in data center racks so they now ship standard with only a PDU power cord (416151-B21). If a user wishes to power a ProLiant ML rack-mount server using a 110V receptacle (NEMA-15), the NEMA power cord must be ordered separately. The 12' cord (AF556A) or 6' cord (187335-001) can be purchased online at HP.COM. In a tower configuration, the servers ship standard with a 6' country specific NEMA power cord. If customers require a local power cord, they can check the power cord matrix for the appropriate country specific sku. Please see the following power cord matrix: http://www.hp.com/go/powercordmatrix .
--------------------	---

UPS and PDU Power Cord Matrix	Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords .
-------------------------------	--

Power Supply	800 Watt-CE Mark Compliant Hot Plug Power Supply (1000 Watt high line) Optional second Power Supply provides redundant capability NOTE: Please see the "Power Specifications" section later in this document for low line and high line requirements.
--------------	--

Standard Features

System Fans	2 fans ship standard, dual redundant fans are optional, 4 fans total supported (does not include power supply or processor heat sink fans)
Required Cabling	For required cabling information, refer to the HP ProLiant ML350 G5 cabling matrix at: http://www.hp.com/servers/proliantML350. NOTE: Please see the "Storage" section of this QuickSpecs for important information on controllers and cables required to support SAS or SATA hard drives as well as storage management software available for SATA hard drives.
Operating Systems and Virtualization Software Support for ProLiant Servers	Microsoft Windows Server Microsoft Windows Server Hyper V Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES) Oracle Enterprise Linux (OEL) NetWare NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: http://www.hp.com/go/ossupport and our driver download page www.hp.com/support/ML350G5.
Installation of Server into Telco Racks	Support for all 2-post Telco racks requires the use of the HP ProLiant ML350 G5 rack kit and an additional option kit from Rack Solutions. http://www.hp.com/go/rackandpower
Factory Express Portfolio for Servers and Storage	HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed. Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches. For more information on Factory Express services for your specific server model please contact your sales representative or go to: http://www.hp.com/go/factory-express.
HP Enterprise Configurator	The HP eConfigure-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance. http://www.hp.com/products/configurator

Standard Features

Service and Support

HP Care Pack services provide total care and support expertise with committed response designed to meet your IT and business needs.

HP Care Pack services include coverage for the HP branded hardware options qualified for the server and purchased at the same time or afterward that are internal to the enclosure. This also includes the 22" and smaller external monitors and tower UPS options up to 3kVA. These items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included, and standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

To fully capitalizing on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vender support solutions, provides a range of support services designed to meet the varying needs of your business. Whether an SMB, or large global corporation, HP has a ProLiant server support offer to help you speedily deploy and maximize system uptime.

Recommended Service - simplify ProLiant solution implementation, maintenance, and management.

- **Support** - 3-Year 4-Hour response 24x7 Same Business Day Coverage only
- **Deployment Service** - Installation and Start up only

Enhanced Service - optimize service level to increase IT performance and availability.

- **Support** - 3-Year Support Plus 24 only

Refer to the information on "Installation & Start-Up" for service on ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet; to be delivered on a scheduled basis 8am-5pm, M-F, excluding HP holidays.

NOTE: For a complete listing of service offerings and information visit:

<http://www.hp.com/services/proliantservices>

<http://www.hp.com/go/proliant/carepack>

Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

NOTE: Please note that SFF tower or rack models can only be configured with SFF 2.5" SAS or SATA hard drives and LFF tower or rack models can be only configured with LFF 3.5" SAS or SATA hard drives.

HP ML350 G5 Entry Models	Processor(s) One of the following depending on Model	(1) Quad-Core Intel® Xeon® E5420 Processor (2.50 GHz, 80 Watts, 1333 FSB) (1) Quad-Core Intel® Xeon® E5410 Processor (2.33 GHz, 80 Watts, 1333 FSB)
Tower	Cache Memory	12MB (2 x 6MB) Level 2 cache - 5400 Series
Quad-Core Models	Memory	1 GB (2 x 512 MB)
HP ML350T05 E5420 LFF	Network Controller	Embedded NC373i Multifunction Gigabit Server Adapter
458239-xx1	Storage Controller	Smart Array E200i/64 Controller (RAID 0/1/1+0)
HP ML350T05 E5410 LFF	Hard Drive	None Ship Standard; (0/6 LFF)
458244-xx1	Internal Storage	6TB LFF SATA 6TB LFF SAS
Rack	Optical Drive	Quad-Core: 16x DVD-ROM standard Dual-Core: 48x CD-ROM standard
Quad-Core Models HP ML350R05 E5420 LFF	One of the following depending on Mode	
458240-xx1	PCI-Express Slots	Six expansion slots (three PCI Express, three PCI-X)
	Power Supplies	800-Watt CE-mark compliant Hot-Plug power supply Optional second power supply provides redundant operation
	Fans	2 fans ship standard, 4 fans total supported (does not include power supply or processor heatsink fans)
	Form Factor One of the following depending on Model	Tower Rack (5U), (8.75 in/22.25 cm)

HP ML350 G5 Base Models	Processor(s) One of the following depending on Model	(1) Quad-Core Intel® Xeon® E5430 Processor (2.66 GHz, 80 Watts, 1333 FSB) (1) Quad-Core Intel® Xeon® E5420 Processor (2.50 GHz, 80 Watts, 1333 FSB) (1) Quad-Core Intel® Xeon® E5410 Processor (2.33 GHz, 80 Watts, 1333 FSB)
Tower	Cache Memory	12MB (2 x 6MB) Level 2 cache
Quad-Core Models	Memory	2 GB (2 x 1GB) standard
HP ML350T05 E5430 SFF	Network Controller	Embedded NC373i Multifunction Gigabit Server Adapter
458238-xx1	Storage Controller	Smart Array E200i/128 BBWC Controller (RAID 0/1/1+0/5)
HP ML350T05 E5420 SFF	Hard Drive	None Ship Standard; (0/8 SFF)
458242-xx1	Internal Storage	4TB SFF SATA 4TB SFF SAS
HP ML350T05 E5410 SFF	Optical Drive	Quad-Core: 16x DVD-ROM standard Dual-Core: 48x CD-ROM standard
458246-xx1	One of the following depending on Model	
Rack	PCI-Express Slots	Six expansion slots (three PCI Express, three PCI-X)
Quad-Core Models	Power Supplies	800-Watt CE-mark compliant Hot-Plug power supply Optional second power supply provides redundant operation
HP ML350R05 E5430 SFF	Fans	2 fans ship standard, 4 fans total supported (does not include power supply or processor heatsink fans)
458237-xx1	Form Factor One of the following depending on Model	Tower Rack (5U), (8.75 in/22.25 cm)
HP ML350R05 E5420 SFF		
458243-xx1		



Models

Country Code Key

XX=00
XX=01
XX=03
XX=04
XX=05
XX=20
XX=29
XX=37
XX=42
XX=AA

Tower Code Key

U.S. English
Australia
UK
Germany
France
Brazil
Japan
APD
Europe
PRC

Rack Code Key

U.S. English
N/A
N/A
N/A
N/A
N/A
Japan
APD
Europe
PRC

Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

NOTE: HP does not allow factory integration of options into standard models listed above. Configure-to-order servers must start with a CTO Chassis.

NOTE: FIO indicates that this option only available as a Factory Installable Option.

Step 1: Base Configuration (choose one of the following configurable models)

Models

ML350 G5 Tower Models

LFF - 3.5" Drives

HP ProLiant ML350G5 LFF SAS/SATA Tower CTO Chassis 412645-B21

Includes:

- Embedded NC373i Multifunction Gigabit Server Adapter
- Integrated Smart Array E200i Controller
- Six Hot-Plug (LFF) SAS/SATA Drive Bays
- Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and three x4 PCI Express (with x8 connectors)
- Six USB ports
- 800W Hot-Plug Power Supply
- Tower Form Factor
- Keyboard
- 2-button Mouse

SFF - 2.5" Drives

HP ProLiant ML350G5 SFF SAS/SATA Tower CTO Chassis 395570-B21

Includes:

- Embedded NC373i Multifunction Gigabit Server Adapter
- Integrated Smart Array E200i Controller
- Eight Hot-Plug (SFF) SAS/SATA Drive Bays
- Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and three x4 PCI Express (with x8 connectors)
- Six USB ports
- 800W Hot-Plug Power Supply
- Tower Form Factor
- Keyboard
- 2-button Mouse

ML350 G5 Rack Models

LFF - 3.5" Drives

HP ProLiant ML350G5 LFF SAS/SATA Rack CTO Chassis 412644-B21

Includes:

- Embedded NC373i Multifunction Gigabit Server Adapter
- Integrated Smart Array E200i Controller
- Six Hot-Plug (LFF) SAS/SATA Drive Bays
- Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and three x4 PCI Express (with x8 connectors)
- Six USB ports
- 800W Hot-Plug Power Supply
- Rack (5U) Form Factor

Configuration Information - Factory Integrated Models

SFF - 2.5" Drives	
HP ProLiant ML350G5 SFF SAS/SATA Rack CTO Chassis	395569-B21
Includes:	
Embedded NC373i Multifunction Gigabit Server Adapter	
Integrated Smart Array E200i Controller	
Eight Hot-Plug (SFF) SAS/SATA Drive Bays	
Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and three x4 PCI Express (with x8 connectors)	
Six USB ports	
800W Hot-Plug Power Supply	
Rack (5U) Form Factor	

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

Processors	Quad-Core Processors	
	Quad-Core Intel® Xeon® Processor X5460 (3.16 GHz, 120 Watts, 1333 FSB) ML350G5 FIO Kit	493457-L21
	Quad-Core Intel® Xeon® Processor E5440 (2.83 GHz, 80 Watts, 1333 FSB) ML350G5 FIO Kit	458257-L21
	Quad-Core Intel® Xeon® Processor E5430 (2.66 GHz, 80 Watts, 1333 FSB) ML350G5 FIO Kit	458259-L21
	Quad-Core Intel® Xeon® Processor L5420 (2.50 GHz, 50 Watts, 1333 FSB) ML350G5 FIO Kit	493459-L21
	Quad-Core Intel® Xeon® Processor E5420 (2.50 GHz, 80 Watts, 1333 FSB) ML350G5 FIO Kit	458265-L21
	Quad-Core Intel® Xeon® Processor E5410 (2.33 GHz, 80 Watts, 1333 FSB) ML350G5 FIO Kit	458267-L21
	Quad-Core Intel® Xeon® Processor E5405 (2.00 GHz, 80 Watts, 1333 FSB) ML350G5 FIO Kit	458269-L21
Base Memory	1 GB FBD PC2-5300 2 x 512 MB Single Rank Kit	397409-B21
	2 GB FBD PC2-5300 2 x 1 GB Dual Rank Kit	397411-B21
	2 GB FBD PC2-5300 2 x 1 GB Low Power Single Rank Kit	461826-B21
	4 GB FBD PC2-5300 2 x 2 GB Dual Rank Kit	397413-B21
	4 GB FBD PC2-5300 2 x 2 GB Low Power Dual Rank Kit	461828-B21
	8 GB FBD PC2-5300 2 x 4 GB Dual Rank Kit	397415-B21
	8 GB FBD PC2-5300 2 x 4 GB Low Power Dual Rank Kit	466440-B21
	NOTE: Memory Option Kits include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, please visit: http://h18004.www1.hp.com/products/servers/platforms/energyefficient/ .	
Smart Array E200i Controller Cache	HP SA E200 64MB Cache FIO Kit	405102-B21
	NOTE: Select this option for RAID 0/1/1+0	
	128-MB Battery-Backed Write Cache (BBWC)	351580-B21
	NOTE: Select this option for RAID 0/1/1+0/5.	
Optical Drive	16X DVD-ROM Drive Option Kit (Carbon)	217053-B21
	HP Half-Height SATA DVD-ROM Optical Drive	447326-B21
	HP Half-Height SATA DVD RW Optical Drive	447328-B21

Configuration Information - Factory Integrated Models

Step 3: Choose Additional Factory Integratable Options

Controllers	HP Smart Array P400/256 MB Controller	405132-B21
	NOTE: SAS Controller supporting RAID 0/1/1+0/5.	
	HP Smart Array P600/256 BBWC Controller	337972-B21
	NOTE: SAS Controller supporting RAID 0/1/1+0/5/6.	
	Smart Array 642 Controller	291967-B21
	NOTE: U320 Controller.	
	Smart Array 6402/128 Controller	273915-B21
Insight Control suite	NOTE: U320 Controller.	
	Smart Array 6404/256 Controller	273914-B21
	NOTE: U320 Controller.	
	64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	374654-B21
	HP Smart Array 6404/512 FIO CNTRLR	452240-B21
	HP Insight Control suite, No Media 1-Server License Factory-Integratable Option (FIO) including 1 year of 24x7 Technical Support and Updates	582765-B21

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below.

Core Options

NOTE: Some options may not be factory configurable. Please contact your local sales representative for additional information.

HP ProLiant ML350 G5 Unique Options	HP Redundant Fan ML350 G5 Kit	409579-B21
	HP PCI-X Expander Kit (2 x 64-bit 100MHz PCI-X slots) NOTE: The HP PCI-X Expander kit converts a single PCI Express slot (slot 6) into two full height, full length 64-bit 100MHz PCI-X slots. NOTE: The HP PCI-X Expander kit can support a maximum of one (1) HP Smart array, HBA, or SCSI PCI-X adapter. Prioritize internal slots for use with PCI-X storage controllers. Please refer to the ML350G5 user guide for additional details.	435670-B21
	HP Tower to Rack Conversion Kit - ML350 G5 Kit NOTE: See "Redundant Options" section below for Hot Plug Redundant Power supplies.	412640-B21

Processors

Quad-Core Processors

Quad-Core Intel® Xeon® Processor X5460 (3.16 GHz, 120 Watts, 1333 FSB)	493457-B21
Quad-Core Intel® Xeon® Processor E5440 (2.83 GHz, 80 Watts, 1333 FSB)	458257-B21
Quad-Core Intel® Xeon® Processor E5430 (2.66 GHz, 80 Watts, 1333 FSB)	458259-B21
Quad-Core Intel® Xeon® Processor L5420 (2.50 GHz, 50 Watts, 1333 FSB)	493459-B21
Quad-Core Intel® Xeon® Processor E5420 (2.50 GHz, 80 Watts, 1333 FSB)	458265-B21
Quad-Core Intel® Xeon® Processor E5410 (2.33 GHz, 80 Watts, 1333 FSB)	458267-B21
Quad-Core Intel® Xeon® Processor E5405 (2.00 GHz, 80 Watts, 1333 FSB)	458269-B21
Quad-Core Intel® Xeon® Processor X5355 (2.66 GHz, 120 Watts, 1333 FSB)	436015-B21
Quad-Core Intel® Xeon® Processor E5345 (2.33 GHz, 80 Watts, 1333 FSB)	436013-B21
Quad-Core Intel® Xeon® Processor E5335 (2.00 GHz, 80 Watts, 1333 FSB)	437444-B21
Quad-Core Intel® Xeon® Processor E5320 (1.86 GHz, 80 Watts, 1066 FSB)	435512-B21
Quad-Core Intel® Xeon® Processor E5310 (1.6 GHz, 80 Watts, 1066 FSB)	435513-B21

Dual-Core Processors

Dual-Core Intel® Xeon® Processor X5260 (3.33 GHz, 80 Watts, 1333 FSB)	493461-B21
Dual-Core Intel® Xeon® Processor E5205 (1.86 GHz, 65 Watts, 1066 FSB)	458725-B21

Memory (DIMMs)

1 GB FBD PC2-5300 2 x 512 MB Single Rank Kit	397409-B21
2 GB FBD PC2-5300 2 x 1 GB Dual Rank Kit	397411-B21
2 GB FBD PC2-5300 2 x 1 GB Low Power Single Rank Kit	461826-B21
4 GB FBD PC2-5300 2 x 2 GB Dual Rank Kit	397413-B21
4 GB FBD PC2-5300 2 x 2 GB Low Power Dual Rank Kit	461828-B21
8 GB FBD PC2-5300 2 x 4 GB Dual Rank Kit	397415-B21
8 GB FBD PC2-5300 2 x 4 GB Low Power Dual Rank Kit	466440-B21

NOTE: Memory Option Kits include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, please visit:
<http://h18004.www1.hp.com/products/servers/platforms/energyefficient/>



Core Options

Optical Drives	Floppy Drive ML350/370 G5 Kit	409582-B21
	16X DVD-ROM Drive Option Kit (Carbon)	217053-B21
	HP Half-Height SATA DVD-ROM Optical Drive	447326-B21
	HP Half-Height SATA DVD RW Optical Drive	447328-B21
NOTE: Please note that some of the earlier BTO models may not support adding SATA Optical Drives. To ensure compatibility of the SATA Optical Drives, please add additional optical drives only on models with Quad-Core 5400 Series processors.		

Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug SFF Enterprise (ENT) Drives

NOTE: Please note that SFF 2.5" (small form factor) drives can only be installed on tower or rack models with SFF chassis (models).

HP 300GB 6G SAS 10K SFF DP ENT HDD	507127-B21
HP 300GB 3G SAS 10K SFF DP ENT HDD	492620-B21
HP 146GB 6G SAS 15K SFF DP ENT HDD	512547-B21
HP 146GB 3G SAS 15K SFF DP ENT HDD	504062-B21
HP 146GB 6G SAS 10K SFF DP ENT HDD	507125-B21
HP 146GB 3G SAS 10K SFF DP ENT HDD	418367-B21
HP 72GB 6G SAS 15K SFF DP ENT HDD	512545-B21
HP 72GB 3G SAS 15K SFF DP ENT HDD	418371-B21
HP 72GB 3G SAS 10K SFF DP ENT HDD	384842-B21

SAS Hot Plug 3.5" Enterprise (ENT) Drives

NOTE: Please note that LFF 3.5" (large form factor) drives can only be installed on tower or rack models with LFF chassis (models).

HP 600GB 6G SAS 15K 3.5" DP ENT HDD	516828-B21
HP 450GB 6G SAS 15K 3.5" DP ENT HDD	516816-B21
HP 450GB 3G SAS 15K 3.5" DP ENT HDD	454232-B21
HP 300GB 6G SAS 15K 3.5" DP ENT HDD	516814-B21
HP 300GB 3G SAS 15K 3.5" DP ENT HDD	416127-B21
HP 146GB 3G SAS 15K 3.5" DP ENT HDD	384854-B21

SAS Hot Plug SFF Midline (MDL) Drives

HP 500GB 6G SAS 7.2K SFF DP MDL HDD	507610-B21
-------------------------------------	------------

SAS Hot Plug 3.5" Midline (MDL) Drives

HP 1TB 3G SAS 7.2K 3.5" DP MDL HDD	461137-B21
HP 1TB 6G SAS 7.2K 3.5" DP MDL HDD	507614-B21
HP 750GB 3G SAS 7.2K 3.5" DP MDL HDD	461135-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html (Worldwide)

SATA Hot Plug SFF Midline (MDL) Drives

HP 500GB 3G SATA 7.2K 2.5in MDL HDD	507750-B21
HP 160GB 3G SATA 7.2K 2.5in MDL HDD	530888-B21

SATA Hot Plug 3.5" Midline (MDL) Drives

HP 1TB 3G SATA 7.2K 3.5" MDL HDD	454146-B21
----------------------------------	------------



Core Options

HP 750GB 3G SATA 7.2K 3.5" MDL HDD	458930-B21
HP 500GB 3G SATA 7.2K 3.5" MDL HDD	458928-B21
HP 250GB 3G SATA 7.2K 3.5" MDL HDD	458926-B21
SATA Hot Plug SFF Entry (ETY) Drives	
HP 250GB 3G SATA 5.4K SFF ETY HDD	460355-B21
HP 120GB 1.5G SATA 5.4K SFF ETY HDD	458924-B21
SATA Hot Plug 3.5" Entry (ETY) Drives	
HP 160GB 3G SATA 7.2K 3.5" ETY HDD	458945-B21
NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13021_div/13021_div.html (Worldwide)	
3.5" SATA Hot Plug Drives	
HP 750GB 1.5G SATA 7.2K 3.5" HDD	432341-B21
HP 500GB 1.5G SATA 7.2K 3.5" HDD	395473-B21
HP 250GB 1.5G SATA 7.2K 3.5" HDD	349239-B21
HP 160GB 1.5G SATA 7.2K 3.5" HDD	349238-B21
NOTE: The previous generation of 1.5G SATA drives are still supported. These drives can be purchased as an option, however they are no longer configurable.	
NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18004.www1.hp.com/products/quickspecs/11940_div/11940_div.html	
SATA Hot Plug Midline (MDL) Solid State Drives	
HP 60GB 3G SATA 2.5in MDL 1y Wty SSD	572071-B21
HP 120GB 3G SATA 2.5in MDL 1y Wty SSD	572073-B21
SATA Hot Plug 3.5" Midline (MDL) Solid State Drives	
HP 60GB 3G SATA 3.5in MDL 1y Wty SSD	570761-B21
HP 120GB 3G SATA 3.5in MDL 1y Wty SSD	570763-B21
NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13415_div/13415_div.html (Worldwide)	

Communications

Gigabit Ethernet Adapters	
HP NC112T PCIe Gigabit Server Adapter	503746-B21
HP NC360T PCI Express Dual Port Gigabit Server Adapter	412648-B21
HP NC364T PCI Express Quad Port Gigabit Server Adapter	435508-B21
NOTE: Does not support Windows 2000.	
NOTE: There is a maximum of five NC364T PCI Express Quad Port Gigabit Server Adapter NICs allowed in this server.	
HP NC373F PCI Express Multifunction Gigabit Server Adapter	394793-B21
HP NC373T PCI Express Multifunction Gigabit Server Adapter	394791-B21
HP NC380T PCI Express Dual Port Multifunction Gigabit Server Adapter	394795-B21
NOTE: Supported on a full length-full height slot only.	
10 Gigabit Ethernet Adapters	
HP NC522SFP Dual Port 10GbE Server Adapter	468332-B21
NOTE: A minimum of two gigabyte (2 GB) of server memory is required per each NC522SFP adapter.	
NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.	
NOTE: Please see the QuickSpecs for Technical Specifications and additional information: www.hp.com/go/ProLiantNICs	



Core Options

Power Supplies	Hot Plug Redundant Power Supply 350/370/380 G5 AU Kit	399771-011
	Hot Plug Redundant Power Supply 350/370/380 G5 EU Kit	399771-021
	Hot Plug Redundant Power Supply 350/370/380 G5 JP Kit	399771-291
	Redundant Power Supply 350/370/380 G5 Kit (IEC Cord)	399771-B21
	Hot Plug Redundant Power Supply 350/370/380 G5 UK Kit	399771-031
	Redundant Power Supply 350/370/380 G5 Kit (NEMA Cord)	399771-001
	Power Options	
	Redundant Fan ML350 G5 Kit	409579-B21

Additional Options

HP Insight Software	HP Insight Control server deployment	
	HP Insight Control server deployment, Electronic License including 1 year of 24x7 Technical Support and Updates	T9082AAE
	NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.	
	NOTE: Electronic software is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent.	
	NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.	
	NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/insightupdates .	
	NOTE: For additional license options please see the Insight Control QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html	
	HP Insight Control for Linux	
	HP Insight Control for Linux, 1-server license, including one year of 24x7 Technical Support and Updates, Electronic	T9084BAE
	HP Insight Control for Linux, No Media, 1-Server license, including one year of 24x7 Technical Support and Updates	464423-B22
	HP Insight Control for Linux, Media pack (DVD) - No licenses included	464422-B22
	NOTE: Media pack DVD contains the ISO image for HP Insight Control for Linux, HP Systems Insight Manager, HP Insight Control power management, HP Insight Control virtual machine management, and an integrated installer. Servers must be acquired separately.	
	NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/insightupdates .	
	NOTE: Electronic software is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent.	
	NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single set of activation keys.	
	NOTE: For additional License Kits, including electronic licensing options, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/13019_div/13019_div.html	
	HP Integrated Lights-Out Advanced	
	HP Integrated Lights-Out Advanced, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates	512485-B21
	NOTE: This license allows 1 server to be deployed and managed via HP iLO Advanced. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service	
	NOTE: For additional license kits, including electronic delivery options, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12362_div/12362_div.html	
	HP Insight Rapid Deployment software	
	HP Insight Rapid Deployment software No Media 1-Server License including 1 year of 24x7 Technical Support and Updates	452151-B21
	NOTE: This license allows 1 server to be deployed and managed via RDP. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service	
	NOTE: For additional license kits, including electronic delivery options, please	



Additional Options

see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11053_div/11053_div.html

Storage Controllers

SAS Controllers

Smart Array E200 Controller

HP Smart Array E200/128 BBWC Controller

411508-B21

Smart Array E500 Controller

HP Smart Array E500/256MB Controller

435129-B21

Smart Array P400 Controller

HP Smart Array P400/512MB BBWC Controller

411064-B21

NOTE: Supports RAID 0/1/1+0/5/6.

HP Smart Array P400/256MB Controller

405132-B21

NOTE: Supports RAID 0/1/1+0/5.

Smart Array P600 Controller

HP Smart Array P600/256 BBWC Controller

337972-B21

NOTE: Supports internal or external drive attach.

Smart Array P800 Controller

HP Smart Array P800/512 BBWC Controller

381513-B21

NOTE: Supports internal or external drive attach.

Optional Upgrades

128-MB Battery-Backed Write Cache (BBWC)

351580-B21

NOTE: Supports the Smart Array E200 Controller and Smart Array 642 Controller.

HP SA-P400 and SA-E500 24 In Battery Cable Kit

417836-B21

NOTE: This option kit contains a 24" battery cable and adhesive material for installing a battery into the server if a Smart Array P400 is integrated outside of the factory. For all solutions, please refer to the server QuickSpecs and User's Manual for detailed installation instructions.

512MB Battery-backed cache (BBWC) upgrade

405148-B21

NOTE: for Smart Array P400 Controller.

Battery-backed write cache (BBWC) upgrade

383280-B21

NOTE: for Smart Array P400 Controller.

512MB Battery-backed write cache (BBWC) upgrade

372538-B21

NOTE: For Smart Array P600 Controller.

NOTE: Please see the following QuickSpecs additional information:

http://h18000.www1.hp.com/products/quickspecs/12460_div/12460_div.html
(Smart Array E200 Controller)

http://h18000.www1.hp.com/products/quickspecs/12700_div/12700_div.html
(Smart Array E500 Controller)

http://h18000.www1.hp.com/products/quickspecs/12400_div/12400_div.html
(Smart Array P400 Controller)

http://h18000.www1.hp.com/products/quickspecs/12247_div/12247_div.html
(Smart Array P600 Controller)

http://h18000.www1.hp.com/products/quickspecs/12616_div/12616_div.html
(Smart Array P800 Controller)

SAS HBA

HP SC08Ge Host Bus Adapter

488765-B21

HP SC44Ge Host Bus Adapter

416096-B21

NOTE: When using the SC44Ge with SATA Hard Drives, 1.5G SATA Hard Drives are required. Transfer rate: 1.5 Gb/s, 3 Gb/s SAS.

HP 8 Internal Port SAS HBA with RAID

347786-B21

NOTE: Transfer rate: 1.5 Gb/s, 3 Gb/s SAS.

NOTE: Please see the HBA QuickSpecs for additional information:

http://h18004.www1.hp.com/products/quickspecs/13082_div/13082_div.html
(SC08Ge HBA)

Additional Options

http://h18004.www1.hp.com/products/quickspecs/12617_div/12617_div.html
(SC44Ge HBA)
http://h18004.www1.hp.com/products/quickspecs/12332_div/12332_div.html
(8 Internal Port SAS HBA)

SCSI Controllers for External Drive/Storage Support

Smart Array 6402/128 Controller 273915-B21

NOTE: Ultra320 SCSI.

Smart Array 6404/256 Controller 273914-B21

NOTE: Ultra320 SCSI.

Smart Array 642 Controller 291967-B21

NOTE: Ultra320 SCSI.

128MB Battery-Backed Write Cache (BBWC) 351580-B21

NOTE: Supports the Smart Array E200 Controller and Smart Array 642 Controller.

64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 374654-B21

SCSI HBA

HP SC11Xe Host Bus Adapter 412911-B21

NOTE: Recommended HBA for SCSI tape drive connect.

NOTE: Please see the following QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/11943_div/11943_div.html
(Single Channel Ultra320 SCSI HBA)

http://h18000.www1.hp.com/products/quickspecs/11587_div/11587_div.html
(Smart Array 6400 Series)

http://h18000.www1.hp.com/products/quickspecs/12069_div/12069_div.html
(Smart Array 642)

http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.html
(SC11Xe HBA)

PCI Option

HP x4-x8 PCI-E Bus Expander Option Kit 403724-B21

NOTE: The HP x4/x8 PCI Express Bus Expander kit converts 2 x4 PCI Express slots into a single x8 PCI Express slot for high performance x8 PCI Express cards.

Port Options

Parallel/Serial Port ML370/350 G5 Kit 401222-B21

Tape Storage

NOTE: For the complete listing of Tape Drive offerings, please see:
<http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html>

Tape Drives

DAT USB Tape Drives

HP StorageWorks DAT 160 USB Internal Drive Q1580A

HP DAT 320 USB Internal Tape Drive AJ825A

DAT 320 USB External Tape Drive AJ823A

SAS Tape Drives

NOTE: For the ML350 G5, HP recommends purchasing the HP SC44Ge HBA (416096-B21) for a dedicated SAS HBA for tape.

HP StorageWorks LTO-2 Ultrium 448 SAS Internal Tape Drive DW085A

HP StorageWorks LTO-3 Ultrium 920 SAS Internal Tape Drive EH847A

HP StorageWorks LTO-4 Ultrium 1760 SAS Internal Tape Drive EH919A

HP DAT 320 SAS Internal Tape Drive AJ830A

DAT 320 WW SAS External Tape Drive AJ828A

NOTE: Please refer to the "Tape and Disk-Based Backup" table in the Storage section of this document for a list of SAS controllers with tape support.



Additional Options

For an up-to-date listing of the latest O/S and software support details for HP Ultrium tape drives, please visit: <http://www.hp.com/go/connect>.

HP StorageWorks 1/8 G2 Tape Autoloader

HP StorageWorks 1/8 G2 LTO-4 Ultrium 1760 SAS Tape Autoloader	AK377A
HP StorageWorks 1/8 G2 LTO-3 Ultrium 920 SAS Autoloader	AH558A
HP StorageWorks 1/8 G2 Tape Autoloader Rack Kit	AH166A

NOTE: Required to install the 1/8 G2 Autoloaders in a standard 19-inch rack; includes rails and rackmount instructions.

NOTE: Please reference the Tape Autoloader QuickSpecs at: <http://www.hp.com/go/automation> for additional information needed to create a complete solution.

HP StorageWorks MSL2024 Tape Library

HP StorageWorks MSL2024 1 LTO-4 Ultrium 1760 SAS Drive Library	AK378A
HP StorageWorks MSL2024 1 LTO-3 Ultrium 920 SAS Drive Library	AH559A

HP StorageWorks MSL4048 Tape Library

HP StorageWorks MSL4048 2 LTO-4 Ultrium 1760 SAS Drive Library	AK380A
HP StorageWorks MSL4048 1 LTO-3 Ultrium 920 SAS Drive Library	AH560A

NOTE: Please reference the MSL Tape Library QuickSpecs at: <http://www.hp.com/go/automation> for additional information needed to create a complete solution; reference current compatibility information at: <http://www.hp.com/go/ebs>.

Disk-Based Backup

RDX Removable Disk Backup

HP StorageWorks RDX500 Internal Removable Disk Backup System	AJ934A
--	--------

NOTE: 500 GB of Disk Storage.

NOTE: Please see the HP RDX Removable Disk Backup System QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/13036_div/13036_div.html

D2D Backup

HP StorageWorks D2D2502i Backup System	EJ001A
--	--------

NOTE: 2 TB raw capacity/1.5 TB useable capacity.

HP StorageWorks D2D2504i Backup System	EJ002A
--	--------

NOTE: 4 TB raw capacity/3 TB useable capacity.

NOTE: Please see the HP D2D Backup Systems QuickSpecs for additional information: <http://www.hp.com/go/d2d>.

Additional Options

StorageWorks Options **StorageWorks Fibre Channel HBAs**

NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see:
<http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>

Brocade Fibre Channel HBAs

HP StorageWorks 81B PCI-e FC HBA Single Port	AP769A
HP StorageWorks 82B PCI-e FC HBA Dual Port	AP770A
HP StorageWorks 41B 4Gb PCI-e FC HBA	AP767A
HP StorageWorks 42B 4Gb Dual-Port PCI-e FC HBA	AP768A

Emulex Fibre Channel HBAs

HP StorageWorks 81E PCI-e FC HBA Single Port	AJ762A
HP StorageWorks 82E PCI-e FC HBA Dual Port	AJ763A
HP StorageWorks FC2142 4Gb PCI-e HBA	A8002A
HP StorageWorks FC2242 Dual Channel 4Gb PCI-e HBA	A8003A

QLogic Fibre Channel HBAs

HP StorageWorks 81Q PCI-e FC HBA Single Port	AK344A
HP StorageWorks 82Q PCI-e FC HBA Dual Port	AJ764A
HP StorageWorks FC1142 4Gb PCI-e HBA	AE311A
HP StorageWorks FC1242 Dual Channel 4Gb PCI-e HBA	AE312A

StorageWorks SCSI HBA

HP U320e SCSI Host Bus Adapter	AH627A
--------------------------------	--------

NOTE: Recommended HBA for MSL SCSI Tape Library connect.

HP StorageWorks Modular Smart Array

MSA SAN Storage Arrays

HP StorageWorks Modular Smart Array 20	335921-B21
--	------------

NOTE: Rack-mountable 12 (SATA) drive enclosure with U320 Host connectivity, redundant power supplies.

NOTE: The Modular Smart Array Enclosure 20 Family supports the SATA 1.5Gb/s 3.5" Hot Plug Hard Drives.

HP StorageWorks 50 Modular Smart Array	364430-B21
--	------------

NOTE: Please see the Modular Smart Array 50 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at:

http://h18000.www1.hp.com/products/quickspecs/12245_div/12245_div.html (Worldwide)

HP StorageWorks 60 Modular Smart Array	418408-B21
--	------------

NOTE: Please see the Modular Smart Array 60 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at:

http://h18000.www1.hp.com/products/quickspecs/12627_div/12627_div.html (Worldwide)

HP StorageWorks 70 Modular Smart Array	418800-B21
--	------------

NOTE: Please see the Modular Smart Array 70 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at:

http://h18000.www1.hp.com/products/quickspecs/12652_div/12652_div.html (Worldwide)

HP 2012sa Single Controller Modular Smart Array	AJ752A
HP 2012sa Dual Controller Modular Smart Array	AJ753A

Additional Options

NOTE: Please see the Modular Smart Array 2000sa QuickSpecs for additional options and configuration information at:
http://h18000.www1.hp.com/products/quickspecs/13045_div/13045_div.html
 (Worldwide)

Uninterruptible Power Systems

HP Tower UPS

HP T1000v Uninterruptible Power System

HP T1000v UPS

AF443A

NOTE: The T1000v is available in China and India only.

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/13130_div/13130_div.html
 (Worldwide)

HP T1500 G3 UPS Models

HP T1500 G3 UPS, NA

AF450A

HP T1500 G3 UPS, INTL

AF451A

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/13160_div/13160_div.html
 (Worldwide)

HP R/T 2200 G2 UPS

HP, R/T 2200 UPS JPN

AF410A

HP, R/T 2200 UPS INTL

AF411A

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/13179_div/13179_div.html
 (Worldwide)

NOTE: For additional information on HP Uninterruptable Power Systems please go to: www.hp.com/servers/rackups.

HP Rack-mountable UPS

HP R1500 G2 UPS

HP, R1.5kVA UPS, 1U, NA

AF419A

HP, R1.5kVA UPS, 1U, INTL

AF418A

HP, R1.5kVA UPS, 1U, JPN/TW

AF421A

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/12507_div/12507_div.html
 (Worldwide)

HP R3000 UPS

HP R3000 VA UPS, 2U, DTC, INTL

AF414A

HP R3000 VA UPS, 2U, Low voltage L5-30, NA

AF422A

HP R3000 VA UPS, 2U, High voltage L6-20, NA

AF423A

HP R3000 VA UPS, 2U, High voltage L6-20, JPN

AF424A

HP R3000 VA UPS, 2U, Low voltage L5-30, JPN

AF425A

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/10671_div/10671_div.html
 (Worldwide)

HP R3000v Uninterruptible Power System

HP R3000v UPS

AF444A

NOTE: The R3000v is available in China and India only.

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/13129_div/13129_div.html
 (Worldwide)

HP R/T3000 Uninterruptible Power System (UPS)

HP R/T3000 UPS, Low voltage NA/JPN

AF452A

Additional Options

HP R/T3000 UPS, High voltage, NA/JPN	AF453A
HP R/T3000 UPS, High voltage, detachable inlet cord INTL	AF454A
NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/13417_div/13417_div.html (Worldwide)	
HP Rack-Mountable R5500 UPS	
HP R5500 VA UPS, INTL	AF416A
HP R5500 VA UPS, NA/JPN	AF426A
NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/11871_div/11871_div.html (Worldwide)	
NOTE: For additional information on HP Uninterruptable Power Systems please go to: www.hp.com/servers/rackups .	

Power Distribution Units

Monitored PDUs

HP Monitored Power Distribution Unit: Full Rack Version

HP 17.3 kVA S2324 Monitored PDU- dual input, 3Ø, 24A (NA/JPN)	AF503A
HP 8.6 kVA S1324 Monitored PDU- single input, 3Ø, 24A (NA/JPN)	AF504A
HP 16.6 kVA S2140 Monitored PDU- dual input, 1Ø, 40A (NA/JPN)	AF505A
HP 8.3 S1140 Monitored PDU- single input, 1Ø, 40A (NA/JPN)	AF506A
HP 22.1 kVA S2316 Monitored PDU- dual input, 3Ø, 16A (INTL)	AF507A
HP 11 kVA S1316 Monitored PDU- single input, 3Ø, 16A (INTL)	AF508A
HP 14.7 kVA S2132 Monitored PDU- dual input, 1Ø, 32A (INTL)	AF509A
HP 7.3 kVA S1132 Monitored PDU- single input, 1Ø, 32A (INTL)	AF510A
HP 4.9 kVA S124 Monitored PDU- single input, 1Ø, 24A (NA/JPN)	AF914A
HP 7.3 kVA S132 Monitored PDU- single input, 1Ø, 32A (INTL)	AF915A

Modular PDUs 1U/0U (Up to 32 outlets)

NOTE: 1U/0U mounting brackets shipped with the unit (optimized for 10000 G2 and 9000 series racks).

3.6kVA Model - mPDU, 16A, High (WW)	252663-B24
2.8 kVA Model - mPDU, 24A, Low (NA/JPN)	252663-D71
4.9kVA Model - mPDU, 24A, High (NA/JPN)	252663-D72
7.3kVA Model - mPDU, 32A, High (INT'L)	252663-B31
8.3kVA Model - mPDU, 40A, High (WW)	252663-B21
8.3kVA Model - mPDU, 40A, High (power cord attached) (NA/JPN)	252663-D73
9.2kVA Model - mPDU, 40A, High (power cord attached) (INTL)	252663-B32
8.3kVA Model - mPDU 40A, High (core only) (NA/JPN)	252663-D75
9.2kVA Model - mPDU 40 A, High (core only) (Int'l)	252663-B34
8.3kVA Model - mPDU 32A, High (core only) (Int'l)	252663-B33
4.9kVA Model - mPDU 24A, High (core only) (NA/JPN)	252663-D74

NOTE: For additional information on HP Power Distribution Units including accessories please go to: www.hp.com/go/pdu (Worldwide)

Additional Options

HP Rack Series

HP Rack 5000 Series (Graphite Metallic)

HP 5642 Rack-Unassembled

358254-B21

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/12074_div/12074_div.html
(Worldwide)

HP Rack 10000 G2 Series (Carbon/Graphite Metallic)

S10614 (14U) Rack Cabinet - Shock Pallet

292302-B22

10642 G2 (42U) Rack Cabinet - Pallet

AF001A

10642 G2 (42U) Rack Cabinet - Shock Pallet

AF002A

10642 G2 (42U) Rack Cabinet - Crated

AF003A

10642 G2 (42U) Rack Cabinet, with Extension - Shock Pallet

AF004A

10636 G2 (36U) Rack Cabinet - Pallet

AF011A

10636 G2 (36U) Rack Cabinet - Shock Pallet

AF012A

10636 G2 (36U) Rack Cabinet - Crated

AF013A

10636 G2 (36U) Rack Cabinet, with Extension - Shock Pallet

AF014A

10622 G2 (22U) Rack Cabinet - Pallet

AF021A

10622 G2 (22U) Rack Cabinet - Shock Pallet

AF022A

10642 G2 (42U) Rack Cabinet 1200mm Deep - Shock Pallet

AF034A

10642 G2 (42U) Rack Cabinet 1200mm Deep - Pallet

AF038A

10842 G2 (42U) 800mm Wide Rack Cabinet - Pallet

AF041A

10842 G2 (42U) 800mm Wide Rack Cabinet - Shock Pallet

AF042A

10647 G2 (47U) Rack Cabinet - Pallet

AF031A

10647 G2 (47U) Rack Cabinet 1200mm Deep - Shock Pallet

AF044A

NOTE: Due to handling and shipping requirements, AF044A is only orderable through HP Factory Express. It is not for direct sales. Customer site surveys are required before an order is approved. CTO orders may require additional lead time.

10647 G2 (47U) Rack Cabinet 1200mm Deep - Pallet

AF045A

NOTE: It is mandatory to use a shock pallet when shipping racks with equipment installed.

NOTE: xxxxxx-B22 (shock pallet) used to ship racks with equipment installed (by custom systems, VARs and Channels).

NOTE: Please see the Rack 10000 G2 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:

http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.html
(Worldwide)

NOTE: For additional information regarding Rack Cabinets, please see the following URL: <http://www.hp.com/go/rackandpower>.

HP Rack Options

Keyboards and Monitors

TFT7600 Rackmount Keyboard Monitor US

AG052A

TFT7600 Rackmount Keyboard Monitor UK

AG053A

TFT7600 Rackmount Keyboard Monitor GR

AG054A

TFT7600 Rackmount Keyboard Monitor FR

AG055A

TFT7600 Rackmount Keyboard Monitor IT

AG056A

TFT7600 Rackmount Keyboard Monitor SP

AG057A

TFT7600 Rackmount Keyboard Monitor DEN

AG058A

TFT7600 Rackmount Keyboard Monitor NOR

AG059A

TFT7600 Rackmount Keyboard Monitor SE/FI

AG060A

TFT7600 Rackmount Keyboard Monitor SWI

AG061A

Additional Options

TFT7600 Rackmount Keyboard Monitor PORT	AG062A
TFT7600 Rackmount Keyboard Monitor BEL	AG063A
TFT7600 Rackmount Keyboard Monitor JPN2	AG064A
TFT7600 Rackmount Keyboard Monitor RUS	AG065A
TFT7600 Rackmount Keyboard Monitor INTL	AG066A
HP TAA TFT7600 US Rkmntkybd 17in Monitor	AG067A
1U Rackmount Keyboard with USB, US	AG072A
1U Rackmount Keyboard with USB, UK	AG073A
1U Rackmount Keyboard with USB, GR	AG074A
1U Rackmount Keyboard with USB, FR	AG075A
1U Rackmount Keyboard with USB, ITL	AG076A
1U Rackmount Keyboard with USB, SP	AG077A
1U Rackmount Keyboard with USB, DEN	AG078A
1U Rackmount Keyboard with USB, NOR	AG079A
1U Rackmount Keyboard with USB, SE/FI	AG080A
1U Rackmount Keyboard with USB, SWI	AG081A
1U Rackmount Keyboard with USB, PORT	AG082A
1U Rackmount Keyboard with USB, BEL	AG083A
1U Rackmount Keyboard with USB, JPN2	AG084A
1U Rackmount Keyboard with USB, RUS	AG085A
1U Rackmount Keyboard with USB, INTL	AG086A

NOTE: For additional information regarding Rack Options, please see the following URL: <http://www.hp.com/go/rackandpower>.

HP KVM Switch Options

2x1x16 IP Console Switch with Virtual Media	AF601A
4x1x16 IP Console Switch with Virtual Media	AF602A
2x16 Server Console Switch with Virtual Media	AF600A
0x2x16 KVM Server Console G2 Switch with Virtual Media and CAC	AF618A
0x2x32 KVM Server Console G2 Switch with Virtual Media and CAC	AF619A
PS/2 Virtual Media Interface Adapter, 1 pack	AF604A
NOTE: Requires PS/2 and one USB port on server.	
1x1Ex8 KVM IP Console Switch G2 with Virtual Media and CAC	AF620A
2x1Ex16 KVM IP Console Switch G2 with Virtual Media and CAC	AF621A
4x1Ex32 KVM IP Console Switch G2 with Virtual Media and CAC	AF622A
Server console switch 0x2x8	AF616A
Server console switch 0x2x16	AF617A
HP TAA Server console switch 0x2x16	AF626A
PS/2 Interface Adapter, 1 pack	262588-B21
PS/2 Interface Adapter, 8 pack	262587-B21

NOTE: Cat5e cables are required to connect Interface Adapters to Console Switches. Cat5e cables can be found at the following URL:

<http://www.hp.com/go/kvm>.

HP 1x4 Console Switch	AF611A
PS2 Server Console Cable, 6 ft, 2 pack	AF612A

NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <http://www.hp.com/go/kvm>.

HP Serial Console Server Options

HP 16 Port Serial Console Server (worldwide)	AF101A
--	--------

Additional Options

HP 48 Port Serial Console Server (worldwide)	AF102A
Serial Adapter, RJ45-DB9 DCE Female, 1 Pack	AF103A
Serial Adapter, RJ45-DB9 DCE Female, 8 Pack	AF110A

NOTE: Cat5e cables are required to connect Serial Adapters to Serial Console Servers. Additional Serial Adapters and Cat5e cables can be found at the following URL: <http://www.hp.com/go/kvm>.

NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <http://www.hp.com/go/kvm>.

Rack Kits	HP ML350 G5 Tower to Rack Conversion Kit	412640-B21
------------------	--	------------

USB and SD Options	HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)	DC172B
	USB 1.44-MB External Diskette Drive (Carbonite)	DC141B
	HP USB 04 Standard Keyboard	DT528A# ABA
	HP 1GB USB 2.0 Floppy Drive Key	442085-B21

Service and Support Offerings (HP Care Pack Services)	Hardware Services On-site Service	
	4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years (Electronic)	U4512E
	4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years (Electronic)	U4513E
	6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years (Electronic)	U4514E
	O/S and Hardware Installation	
	Hardware Installation (Electronic)	U4522E
	Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays. (Electronic)	U4523E
	Support Plus	
	Onsite HW support, 8am-9pm, M-F, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. HP holidays. (Electronic)	U4524E
	Support Plus 24	
	Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic	U4525E
	Onsite HW support 24x7, 4hr response and SuSE Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic	U6308E
	Onsite HW support 24x7, 4hr response and Red Hat ES Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic	U8330E
	NOTE: For more information, customer/resellers can contact: http://www.hp.com/services/carepack	

Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

HP ProLiant ML350 G5 Memory Configuration

The HP ProLiant ML350 G5 requires memory interleaving when more than one DIMM is installed. For interleaving, DIMMs must be configured in identical pairs. The system will not boot properly if multiple DIMMs of varying density or type are installed in the system.

Standard Memory

All HP ProLiant ML350 G5 models ship with PC2-5300 Fully Buffered DIMMs (DDR2-667).

Entry models include a single 512 MB DIMM (Dual-Core) or two 512 MB DIMMs (Quad-Core).

Base models include two 512 MB DIMMs (1 GB total memory) or two 1 GB DIMMs (2 GB total memory)

Factory Integrated Models include the memory capacity of your choice.

Common Memory Configuration

Valid DIMM pair combinations use slots 1/5, slots 2/6, slots 3/7, and slots 4/8. Maximum supported memory is 16 GB for Dual-Core 5000 and 5100 series models and 32 GB on Quad-Core 5300 and 5400 series models.

NOTE: Chart does not represent all possible memory configurations.

Memory		Slot							
		1A	2B	3C	4D	5A	6B	7C	8D
Standard	1 GB	512 MB	Empty	Empty	Empty	512 MB	Empty	Empty	Empty
Optional	13 GB	512 MB	2 GB	2 GB	2 GB	512 MB	2 GB	2 GB	2 GB
Maximum	32 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB

Following are memory options available from HP:

1 GB FBD PC2-5300 2 x 512 MB Single Rank Kit	397409-B21
2 GB FBD PC2-5300 2 x 1 GB Dual Rank Kit	397411-B21
2 GB FBD PC2-5300 2 x 1 GB Low Power Single Rank Kit	461826-B21
4 GB FBD PC2-5300 2 x 2 GB Dual Rank Kit	397413-B21
4 GB FBD PC2-5300 2 x 2 GB Low Power Dual Rank Kit	461828-B21
8 GB FBD PC2-5300 2 x 4 GB Dual Rank Kit	397415-B21
8 GB FBD PC2-5300 2 x 4 GB Low Power Dual Rank Kit	466440-B21

NOTE: Memory Option Kits include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, please visit: <http://h18004.www1.hp.com/products/servers/platforms/energyefficient/>.

Online spare memory configuration

FBDIMMs can either be single-rank or dual-rank. Certain FBDIMM configuration requirements are based on these classifications. A dual-rank FBDIMM is similar to having two separate FBDIMMs, or ranks, on the same module. Although only a single FBDIMM module, a dual-rank FBDIMM acts as two separate FBDIMMs.

In online spare mode, a single rank of memory acts as the spare memory. For single-rank FBDIMMs, the entire FBDIMM acts as the spare memory. For a dual-rank FBDIMM, only half of the FBDIMM acts as the spare memory while the other half is available for operating system and application usage.

Online spare FBDIMM configuration requirements (in addition to general configuration requirements):

- When only bank A is being used, it must be fully populated with dual-rank FBDIMMs.
- For optimum memory usage, HP recommends all FBDIMMs be the same size with the same HP part number. If different sized FBDIMMs are used, a portion of the installed memory may not be utilized.

In online spare mode, FBDIMMs must be populated as specified in the following table:

- Configuration 1 (Bank A only) is only supported if using bank A, populated with dual-rank FBDIMMs.
- After installing FBDIMMs, use RBSU to configure the system for online spare memory support.


Bank A 1A and 5A	Bank B 2B and 6B	Bank C 3C and 7C	Bank D 4D and 8D
X	—	—	—
X	X	—	—



Memory

X	X	X	X
---	---	---	---

Storage

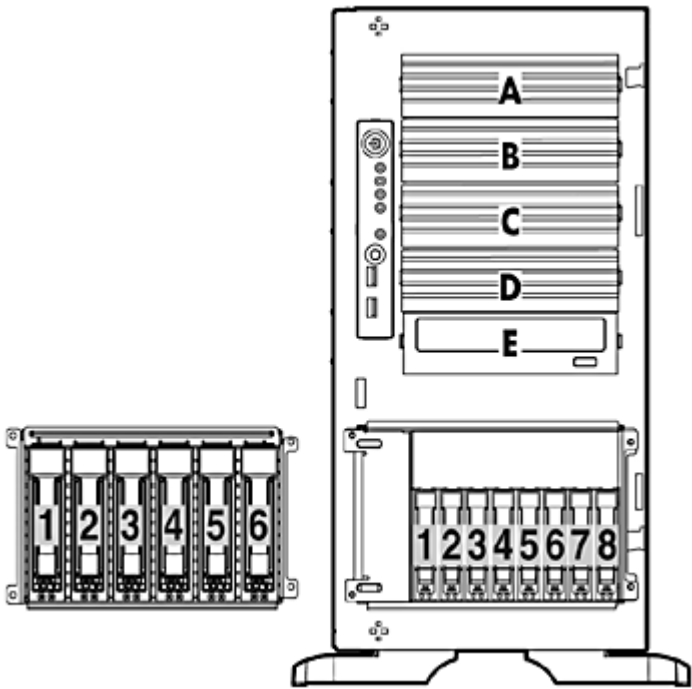

- 1 - 66 x 3.5" (LFF) Hot-Plug SAS/SATA hard drive bays
- Or
- 1 - 88 x 2.5" (SFF) Hot-Plug SAS/SATA hard drive bays
- A,B,C,DAvailable half height media bays
- EOptical Drive

Drive Support

	Quantity Supported	Position Supported	Controller
Removable Media			
1.44-MB Diskette Drive	Up to 1	A, B, C, D, E	Integrated SATA Controller
IDE (ATAPI) CD-ROM Drive	Up to 1	A, B, C, D, E	Integrated SATA Controller
HP DVD±R/RW 16X Half Height	Up to 1	A, B, C, D, E	Integrated SATA Controller
DVD-ROM Drive Option Kit	Up to 1	A, B, C, D, E	Integrated SATA Controller
HP Half-Height SATA DVD-ROM Optical Drive	Up to 1	A, B, C, D, E	Integrated SATA Controller
HP Half-Height SATA DVD RW Optical Drive	Up to 1	A, B, C, D, E	Integrated SATA Controller

Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug SFF Enterprise (ENT) Drives

	Quantity Supported	Position Supported	Controller
300GB 6G SAS 10K DP	Up to 8 SFF	1-8	HP Smart Array E200i/64MB Controller
300GB 3G SAS 10K DP			HP Smart Array E200i/128 BBWC Controller
146GB 6G SAS 15K DP			HP Smart Array E500/256MB Controller
146GB 3G SAS 15K DP			HP Smart Array P400/256MB Controller
146GB 6G SAS 10K DP			HP Smart Array P400/512MB BBWC Controller
146GB 3G SAS 10K DP			HP Smart Array P600/256 BBWC Controller
72GB 6G SAS 15K DP			HP Smart Array P800/512 BBWC Controller



Storage

72GB 3G SAS 10K DP
72GB 3G SAS 15K DP

SAS Hot Plug SFF Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
500GB 6G SAS 7.2K DP	Up to 8 SFF	1-8	HP Smart Array E200i/64MB Controller HP Smart Array E200i/128 BBWC Controller HP Smart Array E500/256MB Controller HP Smart Array P400/256MB Controller HP Smart Array P400/512MB BBWC Controller HP Smart Array P600/256 BBWC Controller HP Smart Array P800/512 BBWC Controller

SAS Hot Plug 3.5" Enterprise (ENT) Drives

	Quantity Supported	Position Supported	Controller
600GB 6G SAS 15K DP	Up to 6 LFF	1-6	HP Smart Array E200i/64MB Controller
450GB 6G SAS 15K DP			HP Smart Array E200i/128 BBWC Controller
450GB 3G SAS 15K DP			HP Smart Array E500/256MB Controller
400GB 3G SAS 10K DP			HP Smart Array P400/256MB Controller
300GB 6G SAS 15K DP			HP Smart Array P400/512MB BBWC Controller
300GB 3G SAS 15K DP			HP Smart Array P600/256 BBWC Controller
146GB 3G SAS 15K DP			HP Smart Array P800/512 BBWC Controller

SAS Hot Plug SFF Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
500GB 6G SAS 7.2K DP	Up to 8	1-8	HP Smart Array P800/512 BBWC Controller HP Smart Array P212/Zero Memory Controller HP Smart Array P212/ 256 MB Controller HP Smart Array P410/256 MB Controller HP Smart Array P410/512 MB BBWC Controller HP Smart Array P411/256 MB Controller HP Smart Array P411/512 MB BBWC Controller

SAS Hot Plug 3.5" Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
1TB 3G SAS 7.2K DP	Up to 6 LFF	1-6	HP Smart Array E200i/64MB Controller
750GB 3G SAS 7.2K DP			HP Smart Array E200i/128 BBWC Controller HP Smart Array E500/256MB Controller HP Smart Array P400/256MB Controller HP Smart Array P400/512MB BBWC Controller HP Smart Array P600/256 BBWC Controller HP Smart Array P800/512 BBWC Controller

SATA Hot Plug SFF Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
500GB 3G SATA 7.2K	Up to 8 SFF	1-8	HP Smart Array E200i/64MB Controller
160GB 3G SATA 7.2K			HP Smart Array E200i/128 BBWC Controller HP Smart Array E500/256MB Controller

Storage

HP Smart Array P400/256MB Controller
 HP Smart Array P400/512MB BBWC Controller
 HP Smart Array P600/256 BBWC Controller
 HP Smart Array P800/512 BBWC Controller

SATA Hot Plug SFF Entry (ETY) Drives

	Quantity Supported	Position Supported	Controller
250GB 3G SATA 5.4K 120GB 1.5G SATA 5.4K	Up to 8	1-8	HP Smart Array E200i/64MB Controller HP Smart Array E200i/128 BBWC Controller HP Smart Array E500/256MB Controller HP Smart Array P400/256MB Controller HP Smart Array P400/512MB BBWC Controller HP Smart Array P600/256 BBWC Controller HP Smart Array P800/512 BBWC Controller

NOTE: HP Systems Insight Manager should not be used to view the status of SATA hard drives and SATA RAID configurations.

SATA Hot Plug 3.5" Entry (ETY) Drives

	Quantity Supported	Position Supported	Controller
160GB 3G SATA 7.2K	Up to 6	1-6	HP Smart Array E200i/64MB Controller HP Smart Array E200i/128 BBWC Controller HP Smart Array E500/256MB Controller HP Smart Array P400/256MB Controller HP Smart Array P400/512MB BBWC Controller HP Smart Array P600/256 BBWC Controller HP Smart Array P800/512 BBWC Controller

SATA Hot Plug 3.5" Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
1TB 3G SATA 7.2K 750GB 3G SATA 7.2K 500GB 3G SATA 7.2K 250GB 3G SATA 7.2K	Up to 6	1-6	HP Smart Array E200i/64MB Controller HP Smart Array E200i/128 BBWC Controller HP Smart Array E500/256MB Controller HP Smart Array P400/256MB Controller HP Smart Array P400/512MB BBWC Controller HP Smart Array P600/256 BBWC Controller HP Smart Array P800/512 BBWC Controller

3.5" SATA Hot Plug Drives

	Quantity Supported	Position Supported	Controller
750GB 1.5G SATA 7.2K 500GB 1.5G SATA 7.2K 250GB 1.5G SATA 7.2K 160GB 1.5G SATA 7.2K	Up to 6	1-6	HP Smart Array E200i/64MB Controller HP Smart Array E200i/128 BBWC Controller HP Smart Array E500/256MB Controller HP Smart Array P400/256MB Controller HP Smart Array P400/512MB BBWC Controller HP Smart Array P600/256 BBWC Controller HP Smart Array P800/512 BBWC Controller

SATA Hot Plug Midline (MDL) Solid State Drives

Storage

	Quantity Supported	Position Supported	Controller
60GB 3.0G SATA SSD	Up to 8	1-8	HP Smart Array E200i/64MB Controller
120GB 3.0G SATA SSD			HP Smart Array E200i/128 BBWC Controller
			HP Smart Array E500/256MB Controller
			HP Smart Array P400/256MB Controller
			HP Smart Array P400/512MB BBWC Controller
			HP Smart Array P600/256 BBWC Controller
			HP Smart Array P800/512 BBWC Controller

SATA Hot Plug 3.5" Midline (MDL) Solid State Drives

	Quantity Supported	Position Supported	Controller
60GB 3.0G SATA SSD	Up to 6	1-6	HP Smart Array E200i/64MB Controller
120GB 3.0G SATA SSD			HP Smart Array E200i/128 BBWC Controller
			HP Smart Array E500/256MB Controller
			HP Smart Array P400/256MB Controller
			HP Smart Array P400/512MB BBWC Controller
			HP Smart Array P600/256 BBWC Controller
			HP Smart Array P800/512 BBWC Controller

External Storage

	Quantity Supported	Position Supported	Host Controller or Adapter
20 Modular Smart Array	Up to 2	External	Smart Array 6402/128 Controller
			Smart Array 6404/256 Controller
50 Modular Smart Array	Up to 2	External	HP Smart Array P600/256 BBWC Controller
	Up to 4		HP Smart Array P800
	Up to 4		
60 Modular Smart Array	Up to 4	External	HP Smart Array P600/256 BBWC Controller
	Up to 8		HP Smart Array P800 Controller
	Up to 8		HP Smart Array E500/256 BBWC Controller
70 Modular Smart Array	Up to 2	External	HP Smart Array P600/256 BBWC Controller
	Up to 4		HP Smart Array P800 Controller
	Up to 4		HP Smart Array E500/256 BBWC Controller
HP 2000sa Modular Smart Array Controller	Up to 4	External	HP SC08Ge Host Bus Adapter

Tape and Disk-Based Backup

NOTE: For a complete listing of compatible tape and disk-based backup offerings, please visit: www.hp.com/go/connect.

	Position Supported	Controller	Part Number
Internal USB Tape Drives	A,B,C,D	USB 2.0 Port	N/A
DAT 40 USB			
DAT 72 USB			
DAT 160 USB			
USB Tape Drives, External	External	USB 2.0 Port	N/A
DAT 40 USB			
DAT 72 USB			
DAT 160 USB			
1U Rack-Mount Kit			

Storage

SCSI Tape Drives, Internal LTO-1 Ultrium 232 LTO-2 Ultrium 448 LTO-3 Ultrium 920 LTO-4 Ultrium 1760 DAT 40 DAT 72 DAT 160	A,B,C,D	HP SC11Xe Host Bus Adapter	412911-B21
SCSI Tape Drives, Internal LTO-3 Ultrium 960 LTO-4 Ultrium 1840	A+B or C+D	HP SC11Xe Host Bus Adapter	412911-B21
SCSI Tape Drives, External LTO-1 Ultrium 232 LTO-2 Ultrium 448 LTO-3 Ultrium 960 LTO-3 Ultrium 920 LTO-4 Ultrium 1760 LTO-4 Ultrium 1840 DAT 40 DAT 72 DAT 160 1U Rack-Mount Kit 3U Rack-Mount Kit	External	HP SC11Xe Host Bus Adapter	412911-B21
SAS Tape Drives, Internal DAT 160 SAS LTO-2 Ultrium 448 SAS LTO-3 Ultrium 920 SAS LTO-4 Ultrium 1760 SAS	A,B,C,D	HP SC44Ge Host Bus Adapter	416096-B21
SAS Tape Drives, Internal LTO-4 Ultrium 1840 SAS	A+B or C+D	HP SC44Ge Host Bus Adapter	416096-B21
SAS Tape Drives, External DAT 160 SAS LTO-2 Ultrium 448 SAS LTO-3 Ultrium 920 SAS LTO-4 Ultrium 1760 SAS LTO-4 Ultrium 1840 SAS 1U Rack-Mount Kit 3U Rack-Mount Kit	External	HP SC44Ge Host Bus Adapter	416096-B21
SCSI Tape Automation, External DAT 72x10 Autoloader LTO-3 Autoloader	External	HP SC11Xe Host Bus Adapter	412911-B21

Storage

1/8 G2 Autoloader
MSL2024
MSL4048
MSL8096
MSL6000

HP U320e SCSI Host Bus Adapter
NOTE: Recommended for MSL tape libraries.

AH627A

SAS Tape Automation, External

External

HP SC44Ge Host Bus Adapter

416096-B21

1/8 G2 Autoloader
MSL2024
MSL4048

HP StorageWorks Fibre Tape Automation, External

External

Please consult the EBS connectivity matrix at:
<http://www.hp.com/go/ebs> for detailed connectivity information

N/A

MSL2024
MSL4048
MSL8096
MSL6000

HP StorageWorks RDX Removable Disk Backup System, Internal

A,B,C,D

USB 2.0 Port

N/A

RDX160
RDX320
RDX500

HP StorageWorks D2D Backup Systems

External

Embedded Network Controller

N/A

D2D120
D2D130
D2D2500i
D2D4000i

Power Specifications

Part Number	380622-001
Spare Kit	403781-001
Operational Input Voltage Range (Vrms)	90 - 264
Frequency Range (Nominal) (Hz)	47 - 63 (50 / 60)

Nominal Input Voltage (Vrms)	100	120	208	220	230	240
Max Rated Output Wattage Rating	800	950	1000	1000	1000	1000
Nominal Input Current (A rms)	10.0	8.8	5.85	5.5	5.2	4.97
Max Rated Input Wattage Rating (Watts)	980	1035	1193	1186	1172	1169
Max. Rated VA (Volt-Amp)	1000	1056	1217	1210	1196	1193
Efficiency (%)	81.5	82	84	84	85	85.5
Power Factor	0.98	0.98	0.98	0.98	0.98	0.98
Leakage Current (mA)	0.44	0.52	0.91	0.96	1.00	1.04
Maximum Inrush Current (A peak)	30	30	30	30	30	30
Maximum Inrush Current duration (milliseconds)	3	3	3	3	3	3

NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at url: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor

- To drill down to calculators:
- Click on: "ProLiant Servers"
 - Click on the Server of interest. Example: ML350 G5
 - Click on: "Power Calculator" link. (You may need to scroll down to see it)

Technical Specifications

System Unit	Tower Dimensions (H x W x D) (with feet/bezel)	18.39 x 8.59 x 23.46 in (46.7 x 21.8 x 59.6 cm)	
	Rack Dimensions (H x W x D) (with feet/bezel)	8.54 x 17.5 x 21.9 in. (21.7 x 44.5 x 55.7cm)	
	Tower Weight (approximate)	Maximum (all hard drives, power supplies, and processors installed)	67 lb (30.4 kg)
		Minimum (one hard drive, power supply, and processor installed)	50 lb (22.7 kg)
	Rack Weight (approximate)	Maximum (all hard drives, power supplies, and processors installed)	61 lb (27.7 kg)
		Minimum (one hard drive, power supply, and processor installed)	44 lb (20.0 kg)
	Max Input Requirements (per power supply)	Rated Line Voltage	100 VAC, 120 VAC 200 - 240 VAC
		Rated Input Current	10A (at 100 VAC) 9A (at 120 VAC) 6.1A (at 200 VAC)
		Rated Input Frequency	50 to 60 Hz
		Rated Input Power	980W (at 100 VAC) 1035W (at 120 VAC) 1170W (at 240 VAC)
	BTU Rating	BTU/HR	3350 BTU/hr (at 100 VAC) 3530 BTU/hr (at 120 VAC) 3990 BTU/hr (at 240 VAC)
	Power Specifications	NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at url: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor - Click on the system of interest. Example: ML350 G5 - Follow the instructions of the next screens.	
	Power Supply Output (per power supply)	Rated Steady-State Power	800 W (at 100 VAC) 850 W (at 120 VAC) 1000 W (at 200-240 VAC)
		Maximum Peak Power	800 W (at 100 VAC) 850 W (at 120 VAC) 1000 W (at 200-240 VAC)
	System Inlet Temperature	Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C

Technical Specifications

Relative Humidity (non-condensing)	Non-operating	(86°F). -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
	Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
Altitude	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Acoustic Noise	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).	
Emissions Classification (EMC)	Idle	
	L WAd	5.2 B
	L pAm	35 dBA
	Operating	
	L WAd	5.3 B
	L pAm	35 dBA
FCC Rating	Class B	
	Normative Standards CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1	

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

Technical Specifications

Smart Array E200i Controller	Disk Drive and Enclosure Interface	3G SAS (Serial Attached SCSI) 1.5G SATA (Serial Advanced Technology Attachment)	
	SAS Connectors	2 internal (SFF8484) x4 wide port connectors	
	Cache Memory Speed	DDR-1/266 MHz provides up to 4.2 GB/s maximum bandwidth.	
	Server Interface	x4 2.5G PCIe provides 2GB/s maximum bandwidth.	
	SAS Speed	x8 3G SAS provides 2.4GB/s maximum bandwidth.	
	Cache Memory	40-bit 64MB ECC read cache or 40-bit 128MB ECC battery backed, transportable read/write cache	
	Logical Volumes Supported	Up to 32 logical volumes	
	Maximum Volume Capacity	4.5TB (6 x 750GB SATA)	
	Host Memory Addressing	64-bit, supporting greater than 4GB server memory space	
	RAID Support	RAID 5 (Distributed Data Guarding) RAID 1, 1+0 (Striping & Mirroring) RAID 0 (Striping)	
	Upgradeable Firmware	Upgradeable Firmware	
Embedded NC373i Multifunction Gigabit Server Adapter	Network Interface	10Base-T/100Base-TX/1000Base-TX	
	Compatibility	IEEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX	
	Data Transfer Method	PCI Express, four lanes (x4)	
	Network Transfer Rate	10Base-T (Half-Duplex)	10 Mb/s
		10Base-T (Full-Duplex)	20 Mb/s
		100Base-TX (Half-Duplex)	100 Mb/s
		100Base-TX (Full-Duplex)	200 Mb/s
		1000Base-TX (Half and Full-Duplex)	2000Mb/s
	Connector	RJ-45	
	Cable Support	10Base-T	Categories 3, 4 or 5 UTP; up to 328 ft (100 m)
		10/100/1000Base-TX	Category 5 UTP; up to 328 ft (100 m)
Environment-friendly Products and Approach	End-of-life Management and Recycling	Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green . To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.	
		The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/green . These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.	

Technical Specifications

© Copyright 2011 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.